



# SPECIFICATION OMNICONTR

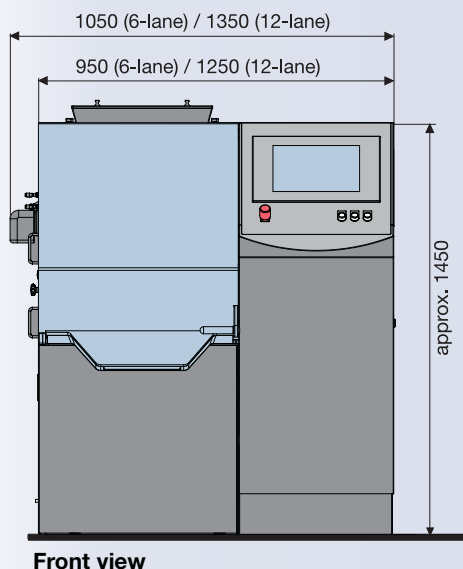

Front view

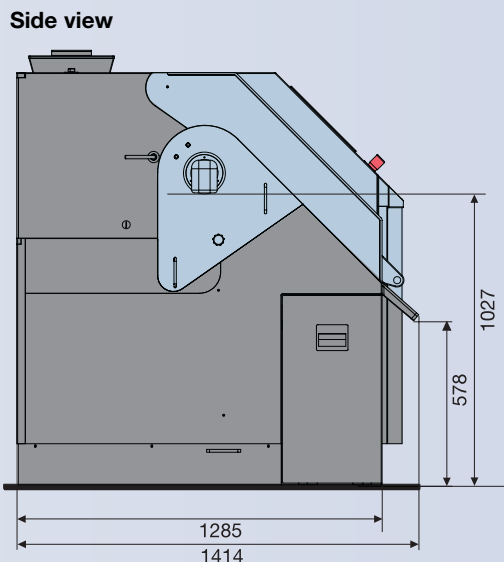

Side view

Tablet shapes*			Tablet cross-sections*	Hard gelatine capsules*
round	oblong	polygonal		
			<ul style="list-style-type: none"> <li>flat</li> <li>biconvex</li> <li>biconcave</li> </ul>	
			<b>Notch</b> <ul style="list-style-type: none"> <li>Lateral side</li> <li>Surface</li> </ul>	

"Format Freedom" tested for \*Standard Geometries within specified \*\*dimensions

## Technical data

<b>Output:</b>	32,500 to 65,000 Products/h <sup>(1)</sup>	<b>Weight:</b>	approx. 1050 kg
<b>Lanes:</b>	6, 12	<b>Power:</b>	230/400 V, 50 Hz, 3 P/N/PE
<b>Cycle frequency:</b>	90 per minute <sup>(2)</sup>	<b>Energy requirement:</b>	approx. 1.5 KVA
<b>Measuring range:</b>	0 – 2,000 mg	<b>Compressed air:</b>	not required
<b>Weighing accuracy:</b>	3s ± 2 mg	<b>Materials used:</b>	
<b>Temperature range:</b>	20°C ± 4°C	<b>Product-contact parts:</b>	aluminum hard-coated, stainless steel, titanium (FDA-compliant)
<b>Max. product length:</b>	21 mm	<b>Machine protection:</b>	stainless steel design or PC panes

(1) Dependent on product dimensions and characteristics

(2) Dependent on size and required accuracy

All information contained in this leaflet are without obligation and are subject to modifications without prior notice!